


Rotary Mounting Options

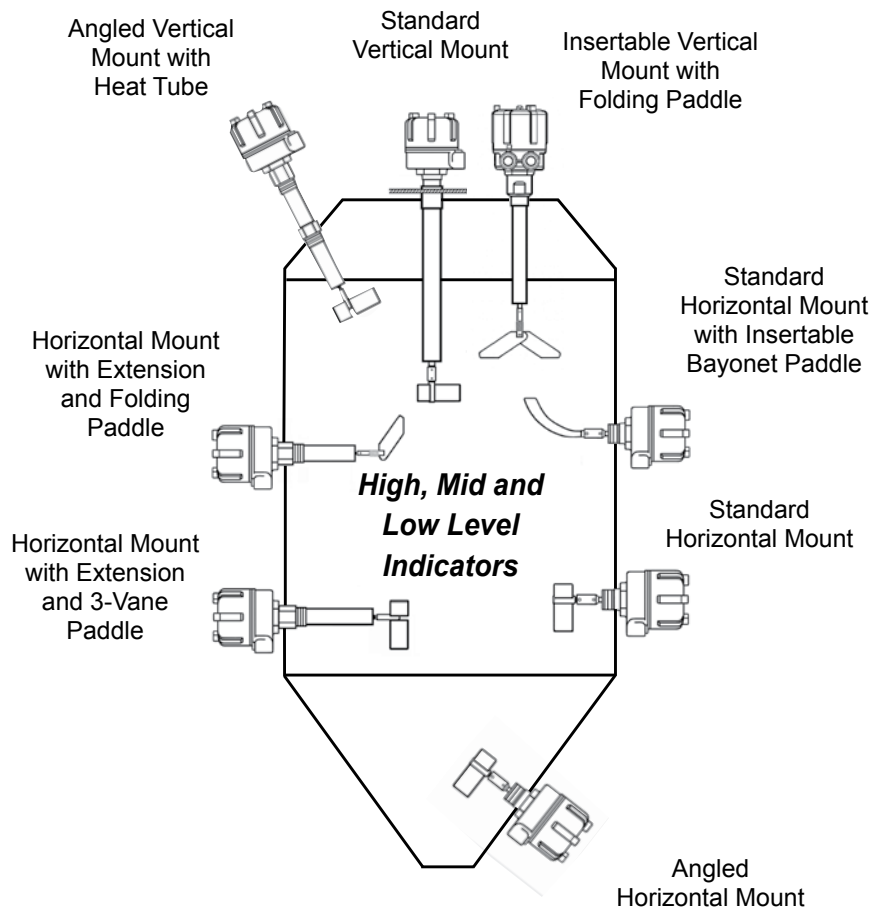

Mounting Plate Selector

Side or horizontal mounting uses a solid shaft coupler and a half coupling mounting plate available in carbon steel or stainless steel.

Top mounting plates in 0°, 10°, 20°, and 30° angles use a flexible shaft coupler to absorb impact when loading and a full coupling mounting plate.



MODEL	MOUNT	ANGLE	COUPLING	CONSTRUCTION	FINISH	GASKET
GRMP-1	Side	0°	Half - 1.25"	Carbon Steel	White Powder Coat	Black Neoprene
GRMP-3	Side	0°	Half - 1.25"	Stainless Steel	Bare	Black Neoprene
GMRP-14	Side	0°	Half - 1.25"	Carbon Steel	Bare	White Silicone
GRMP-2	Top	0°	Full - 1.25"	Carbon Steel	White Powder Coat	Black Neoprene
GRMP-4	Top	0°	Full - 1.25"	Stainless Steel	Bare	Black Neoprene
GRMP-15	Top	0°	Full - 1.25"	Stainless Steel	Bare	White Silicone
GRMP-9	Top	10°	Full - 1.25"	Carbon Steel	White Powder Coat	Black Neoprene
GRMP-16	Top	20°	Full - 1.25"	Carbon Steel	White Powder Coat	Black Neoprene
GRMP-13	Top	30°	Full - 1.25"	Carbon Steel	White Powder Coat	Black Neoprene